


C123

Slot Drill

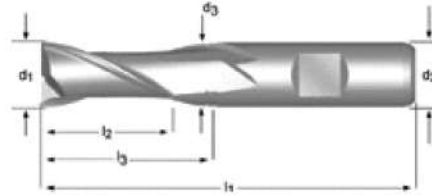

1.1 1.2 1.3 1.4 4.1 5.1 6.1 6.2 6.3

2.1 3.1 3.2 3.3 3.4 4.2 5.2 7.1 7.2 7.3 8.1

d ₁ R Inch	d ₁ R mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ R mm	e-code	
1/16	1.59	6	7	51	2	-	-	C1231/16	2)
	2.00	6	7	51	2	-	-	C1232.0	
	2.50	6	8	52	2	-	-	C1232.5	
	3.00	6	8	52	2	-	-	C1233.0	
1/8	3.18	6	10	54	2	-	-	C1231/8	2)
	3.50	6	10	54	2	-	-	C1233.5	
5/32	3.97	6	11	55	2	-	-	C1235/32	2)
	4.00	6	11	55	2	-	-	C1234.0	
	4.50	6	11	55	2	-	-	C1234.5	
3/16	4.76	6	13	57	2	-	-	C1233/16	2)
	5.00	6	13	57	2	-	-	C1235.0	
	5.50	6	13	57	2	-	-	C1235.5	
	6.00	6	13	57	2	-	-	C1236.0	
1/4	6.35	10	16	66	2	-	-	C1231/4	2)
	6.50	10	16	66	2	-	-	C1236.5	
	7.00	10	16	66	2	-	-	C1237.0	
	7.50	10	16	66	2	-	-	C1237.5	
5/16	7.94	10	19	69	2	-	-	C1235/16	2)
	8.00	10	19	69	2	-	-	C1238.0	
	8.50	10	19	69	2	-	-	C1238.5	
	9.00	10	19	69	2	-	-	C1239.0	
	9.50	10	19	69	2	-	-	C1239.5	
3/8	9.52	10	22	72	2	31.5	9.5	C1233/8	2)
	10.00	10	22	72	2	31.5	9.5	C12310.0	
	11.00	12	22	79	2	-	-	C12311.0	
	12.00	12	26	83	2	37.5	11.5	C12312.0	

d ₁ R̄ Inch	d ₁ R̄ mm	d ₂ R̄h ₆ mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ R̄ mm	e-code	
1/2	12.70	12	26	83	2	37.5	11.5	C1231/2	2)
	13.00	12	26	83	2	37.5	11.5	C12313.0	
	14.00	12	26	83	2	37.5	11.5	C12314.0	
9/16	14.29	12	26	83	2	37.5	11.5	C1239/16	2)
	15.00	12	26	83	2	37.5	11.5	C12315.0	
5/8	15.88	16	32	92	2	43.5	15.5	C1235/8	2)
	16.00	16	32	92	2	43.5	15.5	C12316.0	
	18.00	16	32	92	2	43.5	15.5	C12318.0	
3/4	19.05	20	38	104	2	53.5	18.5	C1233/4	3)
	20.00	20	38	104	2	53.5	19.5	C12320.0	
	22.00	20	38	104	2	53.5	19.5	C12322.0	
	25.00	25	45	121	2	64.5	24.5	C12325.0	
1"	25.40	25	45	121	2	64.5	24.5	C1231	
	30.00	25	45	121	2	64.5	24.5	C12330.0	
	32.00	32	53	133	2	72.5	31.5	C12332.0	

¹⁾Available in HSS-E only

²⁾diameter tolerance -0.0005 inches / -0.0013 inches

³⁾diameter tolerance -0.0005 inches / -0.0015 inches