


## C810

T-slot Cutter

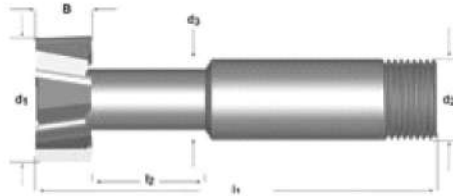

B	B	d <sub>1</sub>	d <sub>1</sub>	T	d <sub>3</sub>	l <sub>2</sub>	l <sub>1</sub>	d <sub>2</sub>	d <sub>2</sub>	z	e-code
Inch	mm	Ṙ	Ṙ	DIN650	Ṙ	mm	mm	Ṙ0,-0.0 25 Inch	Ṙ0,-0.0 25 mm		
	6.00		12.50	6.0	5.00	11	57.0		10.0	6	C8106.0
1/4	6.35	37/64	14.68	1/4	6.35	14	60.5	1/2	12.7	6	C8101/4 <sup>1)</sup>
	8.00		16.00	8.0	7.00	13	61.0		10.0	6	C8108.0
5/16	7.94	45/64	17.86	5/16	7.15	17	65.0	1/2	12.7	6	C8105/16 <sup>1)</sup>
	8.00		18.00	10.0	8.00	17	65.0		12.0	6	C81010.0
	9.00		21.00	12.0	10.00	20	69.0		12.0	6	C81012.0
23/64	9.13	53/64	21.03	3/8	8.75	19	68.5	1/2	12.7	6	C8103/8 <sup>1)</sup>
27/64	10.72	61/64	24.21	7/16	9.50	22	73.0	1/2	12.7	6	C8107/16 <sup>1)</sup>
	11.00		25.00	14.0	12.00	23	79.0		16.0	6	C81014.0
15/32	11.91	1.5/64	27.38	1/2	11.90	24	76.0	1/2	12.7	6	C8101/2 <sup>1)</sup>
	12.00		28.00	16.0	13.00	23	76.0		16.0	6	C81016.0
	14.00		32.00	18.0	15.00	27	98.0		25.0	8	C81018.0
	16.00		36.00	20.0	17.00	30	100.0		25.0	8	C81020.0
	18.00		40.00	22.0	19.00	33	108.0		25.0	8	C81022.0

<sup>1)</sup>Standard - BS 122/4